

Insert 1st Sim Card in Primary Sim Slot

Optional, Can also use another Sim Card as backup in Secondary Sim Slot

Compatible to Orange Network

GSM devise is Positive Trigger by default

Set Administrator Tel Num to Program GSM Device	admin 230XXXXXXXX
Return SMS	You Have been Successfully added as an Authorised User on this Device Make miss call to verify that Relay 1 Trigger
Configure the Device	**117*1**38*HomeAlarm**134*2**36*Alarm**37* Arm**136*DisArm**100*1
Add second admin Tel Number	**19*230XXXXXXXX
Transfer Administrator right to customer	**18*230XXXXXXXX

User1 To rec SMS	**13*230XXXXXXXX
User2 To rec SMS	**14*230XXXXXXXX
User3 To rec SMS	**15*230XXXXXXXX
User To Arm / Disarm or Open / Close	ADD USER 230XXXXXXXX

**32*	Switch on light
**33*	Switch off light
**34*	Switch on light
**35*	Switch off light

Clear User	CLRTBL	Deletes all entries from and prevent User from Arm/Disarm Panel
Delete single User	DELUSER 230XXXXXXXX	Prevent User from Arm/Disarm Panel
CHECK USER	CHKUSER	Checks if a particular number is stored in the "Authorised User"
Prevent User from receiving SMS	**13*0 **14*0 **15*0	

REPORT

Signal strength - Power level - Status of output ports - Status of input ports



GENSET 3

To check the Admin Tel Num

GENSET 2

To check the User Tel Num

- **21*1** Pre-Paid Active
- **22*1** Low Credit Alert active
- **23*5** Set low Credit Value 5
- **24*100** Add Credit No of SMS 100
- **26*0** Clear Credit

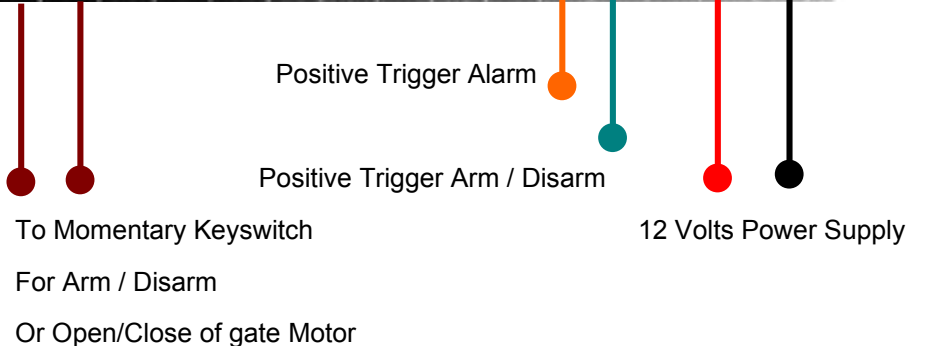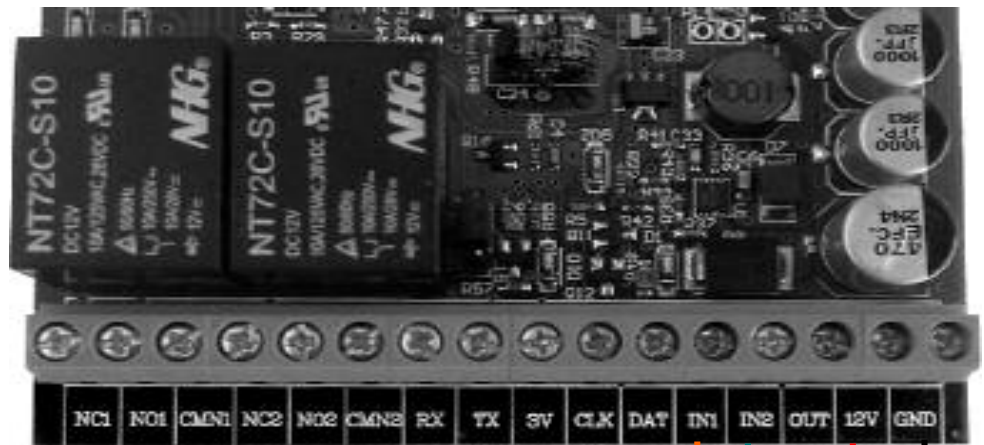

For Negative Trigger, Please use a resistor of 1K, connected between the input and 12V