


Features :

- Elegant ergonomis design
- Face, RFID, PIN identification mode
- TCP/IP communication and USB Host
- 3.0 inch TFT touch screen, T9 Inout, 9 Digit User
- Infrared optical system enables user-identification in poor light environments
- Optional Mifare card module

Standalone



Network

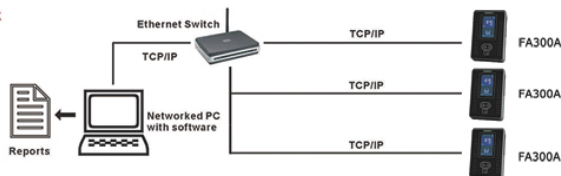

Specifications

LCD Display	Language
3 Inch Touch Screen	Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected
Speaker	Environment
Voice prompt (language can be selected)	Operation temperature: 0°C-45°C Operation humidity: 20%-80%
Capacity	Power Supply
Face: 200(1:N) ID Card: 10,000 Logs: 100,000	12VDC/1.5A
Verification	Package info.
Verification speed (1:1) ≤ 1s	Machine size: 10.4(L)*16(H)*3.6(D)cm Unit packing:28*23*10cm Carton packing:50*30*30cm Real weight:1.1kg Volume weight:1.5kg
Identification	Functions
FRR ≤ 0.01% FAR ≤ 0.0001%	ID Card, Automatic Switch, Self-Service Query, Work Code, T9 input, 9 Digit User ID, DLST, Scheduled bell
Communications	Optional Function
TCP/IP, USB-Host	Mifare Card
Algorithm Version	
Face 7.0	
Image Sensor	
Special Stereo Dual Sensor	
Access Control	
3rd party electric lock, door sensor, exit botton	