

NICE TOO 24V

SOLEMYO 24V

For swing gates with leaves up to 4.5 m.

Telescopic electromechanical gear motor, surface mounted. Ideal for residential use.

Versatile, thanks to its rod shape, available in 2 versions with stroke up to 400 mm and 500 mm, the motor is suitable for any kind of swing gate.

Streamlined design, suitable for modern architectural context.

Reliable and durability, thanks to the sturdy case made up by die-cast aluminium with epoxy painting; stainless steel rod.

Generously sized and practical connection compartment: rapid and easy access from above to internal parts located in the upper section of the motor.

Compatible with the control unit

Moonclever MC424L:

- simple programming, by means of a single key;
- frizione con sicurezza antischiacciamento;
- self-learning of opening and closing limit positions;
- programming of pause time;
- pedestrian pass door;
- deceleration on opening and closing;
- reliable obstacle detection;
- provision for connection of 8.2 KOhm resistive sensitive edges;
- continues to work even during power failures using optional (PS124) batteries that fit inside the control unit.

Also available in practical kit solutions.


Easy to install: thanks to the new fixing brackets supplied and the easily adjustable rear fixing. No welding.

Practical release: with personalized nice key in the upper section of the motor.




DIMENSIONS

T003024

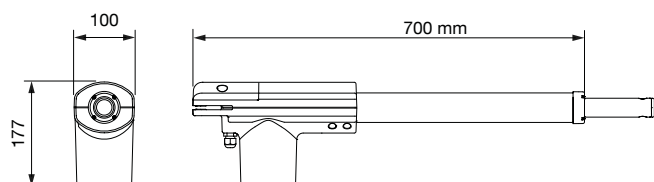

T004524

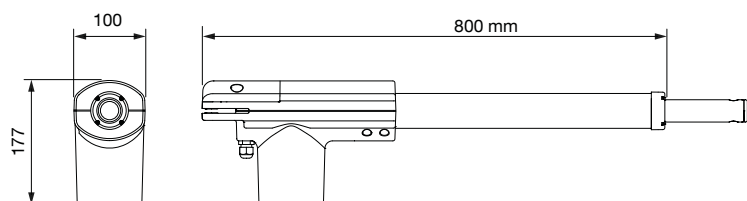

CODE	DESCRIPTION
T003024	TELESCOPIC, 24 Vdc, FOR LEAVES UP TO 3 m AND 300 kg
T004524	TELESCOPIC, 24 Vdc, FOR LEAVES UP TO 4.5 m AND 250 kg

TECHNICAL SPECIFICATIONS

CODE	T003024	T004524
ELECTRICAL DATA		
POWER SUPPLY (Vac 50 Hz)	-	-
POWER SUPPLY (Vdc)		24
RATED ABSORPTION (A)		1.1
MAXIMUM ABSORPTION (A)		5
RATED POWER (W)		30
MAXIMUM POWER (W)		120
PERFORMANCE DATA		
SPEED (M/S)		0.014
RATED FORCE (N)		300
MAXIMUM FORCE (N)		1800
WORK CYCLE (CYCLES/HOUR)		CONTINUOUS
DIMENSIONAL AND GENERAL DATA		
PROTECTION LEVEL (IP)		54
WORKING TEMP. (°C MIN/MAX)		-20 ÷ +50
DIMENSIONS (mm)	700x100x177	800x100x177
WEIGHT (kg)	5.5	6