

WINGO 3524 HS

NEW SOLEMYO OPERA BLUEBUS 24V

For hi-speed automation of swing gates with leaves up to 3 m or 200 kg, ideal for residential applications.


24 Vdc electromechanical gear motor, surface mounted, with magnetic encoder.

Moonclever control unit MC824H:


- simple programming, by means of a single key;
- automatic memorization of limit switches on opening and closing with self-learning function;
- automatic fault diagnostics;
- programming of pause time;
- pedestrian pass door;
- deceleration on opening and closing;
- obstacle detection with dual technology;
- operation in event of power failure by means of optional rechargeable batteries (PS324);
- provision for connection of latest generation resistive sensitive edges.

* Considering standard installation, excluding acceleration and deceleration.

UTILISATION LIMITS

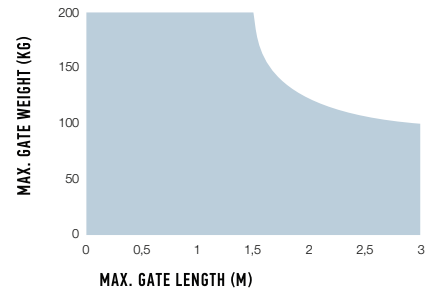

DIMENSIONS

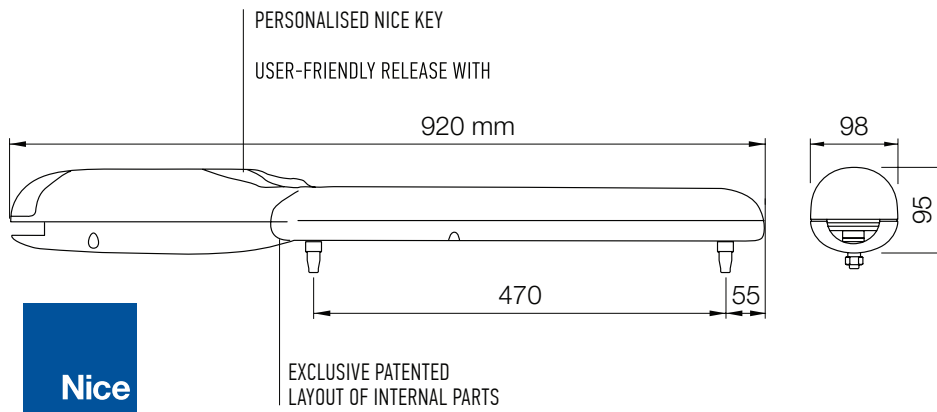

Quick manoeuvres: 90° opening in about 10* seconds.

Reliable: the magnetic encoder ensures the safeguard of set values over time and precise obstacle detection.

Silent: patented layout of internal parts, fewer moving parts.

Easy to install: after the gear motor has been assembled, all electrical connections are made from above.

Pre-assembled travel stops on opening.

CODE	DESCRIPTION
WG3524HS	IRREVERSIBLE, 24 Vdc, FAST, WITH MAGNETIC ENCODER, MECHANICAL STOP ON OPENING AND CLOSING

TECHNICAL SPECIFICATIONS

CODE	WG3524HS
ELECTRICAL DATA	
POWER SUPPLY (Vdc)	24
ABSORPTION (A)	5
POWER (W)	120
PERFORMANCE DATA	
SPEED (m/s)	>> 0.04 <<
FORCE (N)	1500
WORK CYCLE (CYCLES/HOUR)	30
DIMENSIONAL AND GENERAL DATA	
PROTECTION LEVEL (IP)	44
WORKING TEMP. (°C MIN/MAX)	-20 ÷ +50
DIMENSIONS (mm)	920x98x95 h
WEIGHT (kg)	6

